


Product Overview

Lubricator Risers are designed to allow the wireline tool string to be raised above the wellhead valve before and after wireline operations. They enable the wellhead valve to be opened and closed, allowing safe entry and exit of the tool string from the wellbore.

Key Features

- Available in standard lengths from **4 ft to 12 ft**
- Standard bore sizes from **2.50 in to 6.38 in**
- Working pressure ratings from **5,000 PSI to 15,000 PSI**
- Standard end connections include **union box up** and **union pin & collar (nut) down**
- **O-ring sealing** on the pin section provides sealing when made up into the box
- Collar internal thread matches the external thread on the box for **quick hand make-up**
- **Bleed-off valves** available on all models upon request
- Other sizes available on request

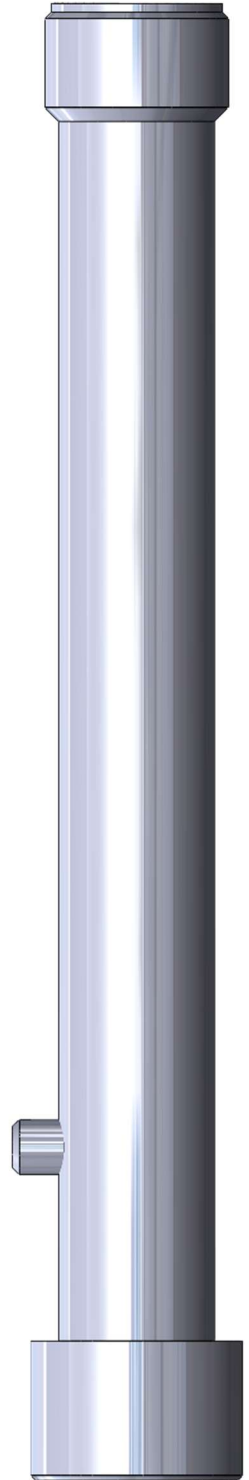

Technical Data

Type / Service	I.D. (in.)	W.P. (PSI)
STD	2.50	5,000
STS	3.00	5,000
STD	2.50	10,000
STD	3.00	10,000
H2S	2.50	5,000
H2S	3.00	5,000
H2S	2.50	10,000
H2S	3.00	10,000
STD	2.50	15,000
H2S	2.50	15,000
H2S	3.00	15,000
STD	4.00	5,000
H2S	4.00	5,000
STD	4.00	10,000
H2S	4.00	10,000
H2S	4.00	15,000
STD	5.00	5,000
STD	5.00	10,000
H2S	5.00	5,000
H2S	5.00	10,000
STD	6.38	5,000
H2S	6.38	5,000
H2S	6.38	10,000